

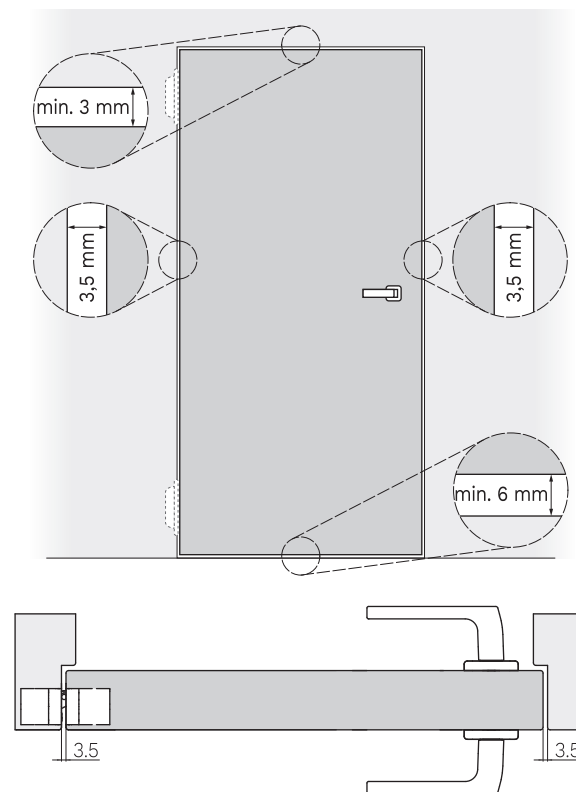
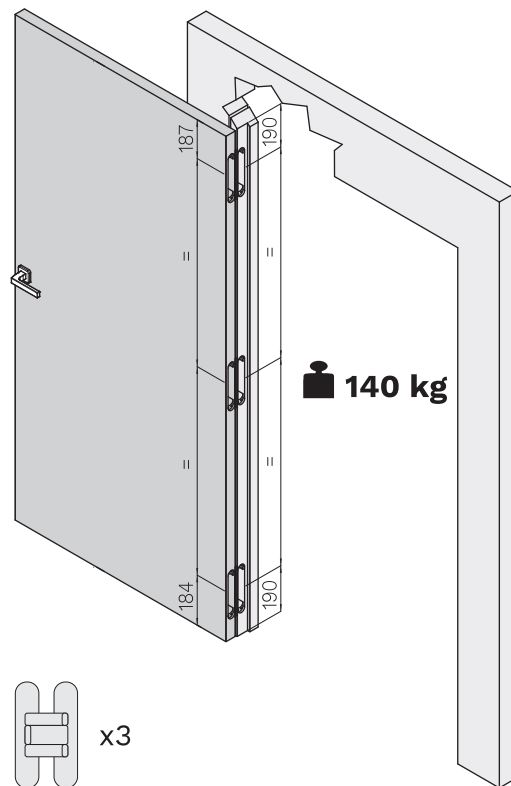


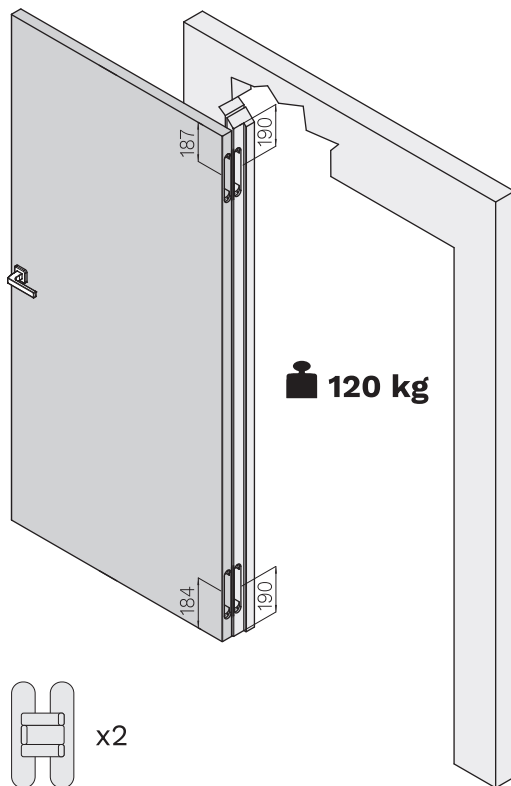


Screws

TSPIC Ø5x MIN.30 DIN7505-A
TSPEI M5X MIN.20 UNI7688 DIN965
TSPEI M5X MIN.20 UNI5933 DIN7991
TSPIT M5X MIN.20 UNI6109 DIN963
TSPIC M5X MIN.20 UNI8113 DIN7500-M

Covers standard fixing

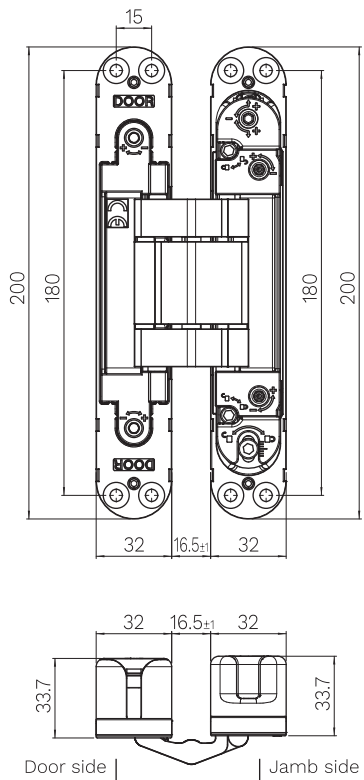


Covers magnetic fixing

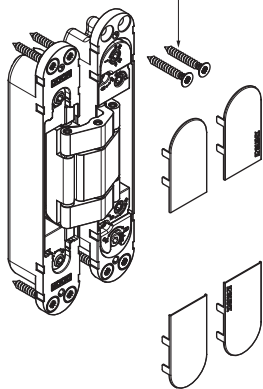


Installation

Hinge centered on the door leaf



Hinge NOT centered on the door leaf



NOTE

Product info

For additional information view the website or product catalogue.


Certification

View product certifications in the catalogue or on the website.

CE	Krona Koblenz SpA Via Romero, 1 47853 Corliano	24
0757	ETA-11/0477 04P/Dp-Aic 003ITA/CPR/2004-06-07	4 7 6 1 1 4 1 13
0757-CPR-229EAD-9000283-1-4 HINGES DO NOT CONTAIN HARMFUL SUBSTANCES		KUBI7 K7120

<https://www.kronakoblenz.com/certificazioni/pdf/ce-certificate-k7120-k7080-koblenz.pdf>

Specific warnings

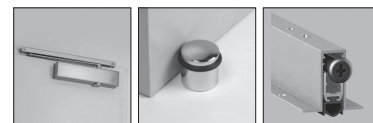

- Double the upper hinge whether a door closer is used;
- Double the bottom hinge whether a door stop or drop down seal is used;
- Place a central hinge whether the door leaf is higher than 2100 mm.







Scan me for view
website or
catalogue

Installation
examples



Depth (+1 mm / -1 mm)

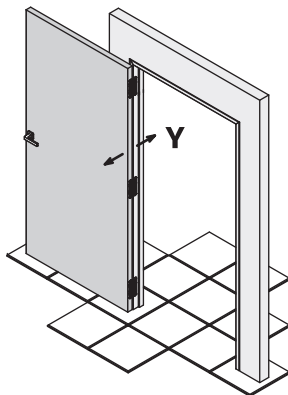

MAX 4Nm

Technical drawing showing the front and side views of a mechanical part with dimensions and tolerances.

Front View (Left):

- Overall width: 33.5^{+1}_0
- Top flange thickness: $8^{+0}_{-0.2}$
- Overall height: $200^{+0.5}_0$
- Internal vertical dimensions: $180^{+0.1}_0$ and $167^{+0.5}_0$
- Section line A-A is indicated.

Side View (Right):

- Overall width: 33.5^{+1}_0
- Top flange thickness: $8^{+0}_{-0.2}$
- Overall height: $200^{+0.5}_0$
- Internal vertical dimensions: $167^{+0.5}_0$ and $180^{+0.1}_0$
- Section line B-B is indicated.

Top View (Bottom):

- Overall width: $32^{+0.5}_0$
- Overall height: $15^{+0.1}_0$
- Internal horizontal dimensions: $167^{+0.5}_0$ and $180^{+0.1}_0$
- Section line A-A is indicated.
- Section line B-B is indicated.
- Maximum fillet radius: max R16
- Maximum thickness: max 4

[illegible]