

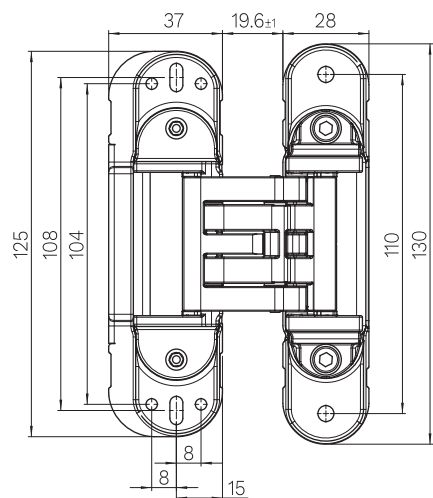
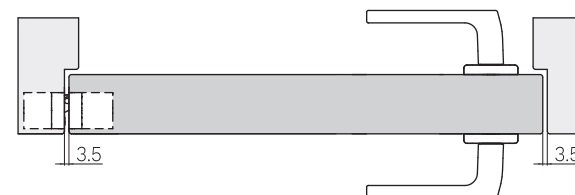
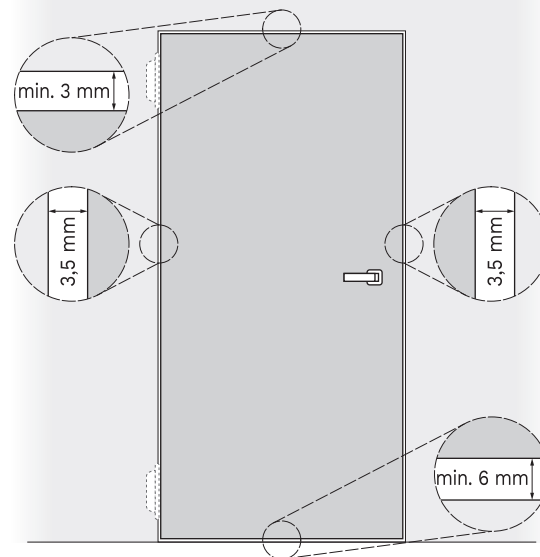




Door side |

Jamb side

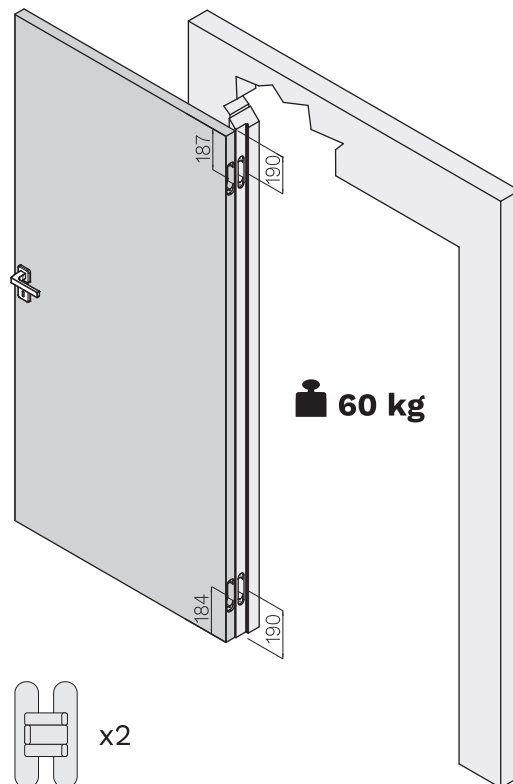


Screws

Covers standard fixing

- TCIC Ø5X min.30 DIN7505-B
- TCIC M5X min.20 UNI 7687 DIN 7985
- TBEI M5X min.20 ISO 7380
- TCIC M5X min.20 UNI 8112 DIN 7500-C

- TCIC Ø4X min.30 DIN7505-B
- TBEI M4X min.20 ISO 7380
- TCIC M4X min.20 UNI 5331 DIN 912
- TCIC M4X min.20 UNI 7687 DIN 7985




- TCIC Ø3.5X min.30 DIN7505-B
- TCIC Ø3.5X min.25 UNI8118 DIN7504-N
- TCIC Ø3.5X min.25 UNI 6954-AB DIN7981

Screws

Covers magnetic fixing


- TSPIC Ø5X min.30 DIN 7505-A
- TSPIC M5X min.20 UNI 7688 DIN 965
- TSPEI M5X min.20 UNI 5933 DIN 7991
- TSPIT M5X min.20 UNI 6109 DIN 963
- TSPIC M5X min.20 UNI 8113 DIN 7500-M
- TSPIC Ø4.8X min.19 UNI 6955-AB
- TSPIT Ø4.8X min.19 UNI 6952-AB




- TCIC Ø3.5X min.30 DIN7505-B
- TCIC Ø3.5X min.25 UNI8118 DIN7504-N
- TCIC Ø3.5X min.25 UNI 6954-AB DIN7981
- TCIC Ø4X min.30 DIN7505-B
- TBEI M4X min.20 ISO 7380
- TCIC M4X min.20 UNI7687 DIN 7985
- TCIC Ø3.9 min.20 UNI6954-AB

Installation

Hinge centered on the door leaf



Hinge NOT centered on the door leaf



NOTE



Product info

For additional information view the website or product catalogue.

Certification

View product certifications in the catalogue or on the website.

Specific warnings



- Double the upper hinge whether a door closer is used;
- Double the bottom hinge whether a door stop or drop down seal is used;
- Place a central hinge whether the door leaf is higher than 2100 mm.



Scan me for view website or catalogue

Installation examples



Vertical (+2.5 mm / -2.5 mm)	Horizontal (+2 mm / -1.5 mm)	Depth (+1 mm / -1 mm)
------------------------------	------------------------------	-----------------------

